

AC Air Conditioner

IP-ACIWM085.003.0X

304 STAINLESS STEEL | INDOOR | WALL MOUNTED | IP54

850 Watt

IP Enclosures Grade 304 stainless steel vertical-mount compact IP54 Air Conditioners are specifically designed for the cooling needs of indoor electrical cabinets. They are corrosion-resistant to harsher environments. They are optimised for door or side-panel mounting and have been designed for high efficiency and low maintenance. They are made in Italy and are SAA approved and certified for use in Australia.

Protection: IP54

Standards (& Conformities): AS/NZS 60335.2.40:2019, AS/NZS 60335.1:2020.






Approval Marks: SAA203165


Temperature Control Type: Digital thermostat with alarm; Door interlock; RS485 Interface.

Casing: Galvanised steel sheet.


Cover: Grade 304 stainless steel.

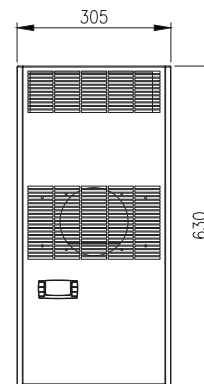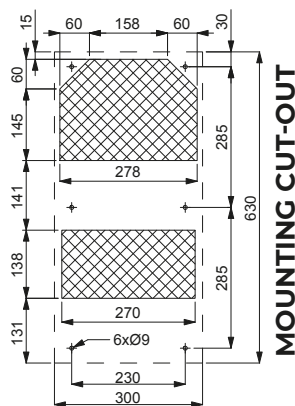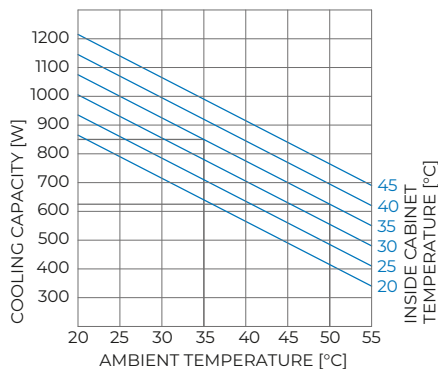

FRONT VIEW

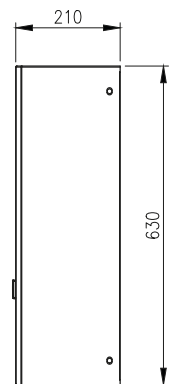

RIGHT SIDE VIEW



BOTTOM VIEW

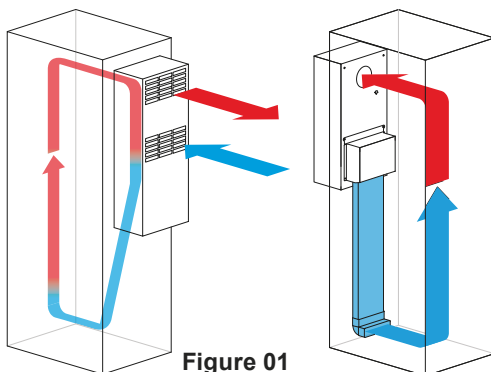
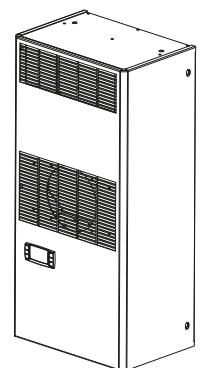


Figure 01




Figure 02

OPTIONAL DUCTING SYSTEM FOR AIR CONDITIONER:


1. **IP-FD085** - 92Hx266Wx65D Internal Flow Diverter; Colour RAL7035 Grey
2. **IP-ACFMV085** - Flow Diverter Adapter suitable for 850W Indoor Air Conditioners
3. **IP-ACDSL1000** - Flat Duct 1000mm suitable for Wall Mounted & Roof Mounted Air Conditioners
4. **IP-ACDSC** - Flat Duct Connector suitable for Wall Mounted & Roof Mounted Air Conditioners
5. **IP-ACDS90** - 90° Duct Bend suitable for Wall Mounted & Roof Mounted Air Conditioners

AC Air Conditioner

IP-ACIWM085.003.0X

304 STAINLESS STEEL | INDOOR | WALL MOUNTED | IP54

850 Watt

Features	Unit	IP-ACIWM085.003.0X
Power supply	V/Hz	230V/1ph/50-60
Dimensions HxWxD	mm	635x305x210
Cooling capacity EN14511 A35-A35	W	850/900
Cooling capacity EN14511 A35-A50	W	625/650
Absorbed electric power EN14511 A35-A35	W	490/530
Absorbed electric power EN14511 A35-A50	W	600/640
Rated current	A	2.65/2.75
Motor circuit breaker / Delayed pre fuse (advised)	A	6
Electrical connection	-	Quick connector
Air flow rate (free blow) enclosure	m³/h	600/625
Operating temperature (ambient)	°C (°F)	+20 / +55 (+68 / +131)
Operating temperature (enclosure)	°C (°F)	+20 / +45 (+68 / +113)
Temperature controller (factory set at 35°C)	-	Digital thermostat with alarm; Door interlock; RS485 Interface
Refrigerant / charge	- g	R134a 390
Condensate management	-	Condensate evaporator with safety overflow
Protection degree EN60529/1 (ambient side)	-	IP34
Protection degree EN60529/1 (enclosure side)	-	IP54
Casing	-	Galvanised steel sheet
Cover	-	Grade 304 stainless steel
Package dimensions HxWxD	mm	690x345x250
Weight (with packaging)	Kg	23 (24)
Conformity / Certifications	-	SAA, AS/NZS 60335.2.40:2019, AS/NZS 60335.1:2020 

ACCESSORIES:

Part Number	Description
IP-FD085	92Hx266Wx65D Internal Flow Diverter; Colour RAL7035 Grey
IP-ACIWM085-FILTER	176Hx279Wx6D External Filter; Polyurethane Filter Mat
DUCTING SYSTEM ACCESSORIES for A/C	Refer to Page 1; Figure 02 Diagram

CERTIFICATES:

IEC 60335-2-40 Safety of household and similar electrical appliances Part 2-40: Particular requirements for electrical heat pumps, air conditioners and dehumidifiers. (IEC 60335-2-40:2018 in conjunction with IEC 60335-1:2010, AMD1:2013, AMD2:2016). Attachment to Test Report IEC 60335-1 (Australia / New Zealand) National Differences. Differences According to AS/NZS 60335.1:2011 + A1:2012 + A2:2014 + A3:2015 + A4:2017 + A5:2019. Certificate RA-64 ELDO 2020.

SAA Approval. Certificate SAA203165 (+Addendums for variants).

SAA Approvals are accredited by the Joint Accreditation Service of Australia and New Zealand (JAS-ANZ) as a third-party certification body to issue certificates for electrical equipment that has proven to comply with the safety requirements of the applicable Australian Standard.

Products are manufactured to Quality, Safety and Environmental Standards.