

AC Air Conditioner

IP-ACOWM200.003.0X

304 STAINLESS STEEL | OUTDOOR | WALL MOUNTED | IP55

2000 Watt

IP Enclosures Grade 304 stainless steel vertical-mount compact IP55 Air Conditioners are specifically designed for the cooling needs of outdoor electrical cabinets. They are corrosion-resistant to harsher environments. They are optimised for door or side-panel mounting and have been designed for high efficiency and low maintenance. Outdoor models include a special cover designed to protect internal components, a condenser fan controller and pressure controller for the compressor. The outdoor range has been designed to provide protection in the harshest outdoor conditions. They are made in Italy and are SAA approved and certified for use in Australia.

Protection: IP55

Standards (& Conformities): AS/NZS 60335.2.40:2019, AS/NZS 60335.1:2020.






Approval Marks: SAA203165


Temperature Control Type: Digital thermostat with alarm; Door interlock; RS485 Interface.

Casing: Galvanised steel sheet.


Cover: Grade 304 stainless steel.

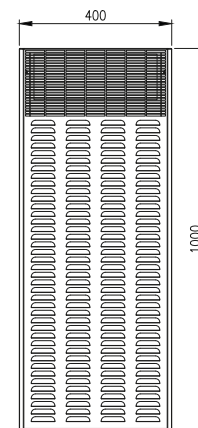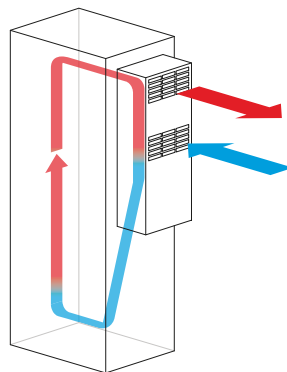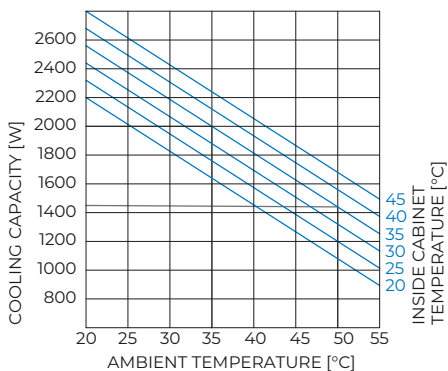



FRONT VIEW

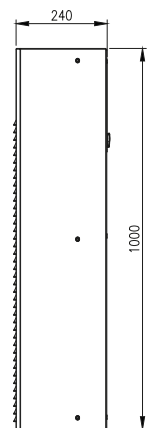

RIGHT SIDE VIEW



BOTTOM VIEW

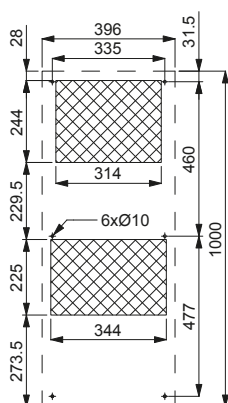


MOUNTING CUT-OUT

AC Air Conditioner

IP-ACOWM200.003.0X

304 STAINLESS STEEL | OUTDOOR | WALL MOUNTED | IP55

2000 Watt

Features	Unit	IP-ACOWM200.003.0X
Power supply	V/Hz	230V/1ph/50-60
Dimensions HxWxD	mm	1000x400x240
Cooling capacity EN14511 A35-A35	W	2000/2100
Cooling capacity EN14511 A35-A50	W	1450/1500
Absorbed electric power EN14511 A35-A35	W	1060/1100
Absorbed electric power EN14511 A35-A50	W	1240/1300
Rated current	A	6.6/6.9
Motor circuit breaker / Delayed pre fuse (advised)	A	10
Electrical connection	-	Quick connector
Air flow rate (free blow) enclosure	m³/h	600/625
Operating temperature (ambient)	°C (°F)	+5 / +55 (+41 / +131)
Operating temperature (enclosure)	°C (°F)	+20 / +45 (+68 / +113)
Temperature controller (factory set at 35°C)	-	Digital thermostat with alarm; Door interlock; RS485 Interface
Refrigerant / charge	- g	R134a 450
Condensate management	-	Condensate evaporator with safety overflow
Protection degree EN60529/1 (ambient side)	-	IP34
Protection degree EN60529/1 (enclosure side)	-	IP55
Casing	-	Galvanised steel sheet
Cover	-	Grade 304 stainless steel
Package dimensions HxWxD	mm	1070x460x265
Weight (with packaging)	Kg	49 (50)
Conformity / Certifications	-	SAA, AS/NZS 60335.2.40:2019, AS/NZS 60335.1:2020 

ACCESSORIES:

Part Number	Description
IP-FD200	142Hx340Wx65D Internal Flow Diverter; Colour RAL7035 Grey

CERTIFICATES:

IEC 60335-2-40 Safety of household and similar electrical appliances Part 2-40: Particular requirements for electrical heat pumps, air conditioners and dehumidifiers. (IEC 60335-2-40:2018 in conjunction with IEC 60335-1:2010, AMD1:2013, AMD2:2016). Attachment to Test Report IEC 60335-1 (Australia / New Zealand) National Differences. Differences According to AS/NZS 60335.1:2011 + A1:2012 + A2:2014 + A3:2015 + A4:2017 + A5:2019. Certificate RA-64 ELDO 2020.

SAA Approval. Certificate SAA203165 (+Addendums for variants).

SAA Approvals are accredited by the Joint Accreditation Service of Australia and New Zealand (JAS-ANZ) as a third-party certification body to issue certificates for electrical equipment that has proven to comply with the safety requirements of the applicable Australian Standard.

Products are manufactured to Quality, Safety and Environmental Standards.